

Arqstone sinks

Installation and care guide




Arqstone is crafted from natural quartz and is exceptionally strong, durable and easy to clean. Arqstone sinks are designed for normal domestic use. Follow these guidelines to keep your Arqstone sink looking beautiful.

Looking after your Arqstone sink


- Avoid placing hot pans or objects directly onto the sink. Instead, use a wooden board, stainless steel rollout mat or other device to protect the sink.
- Do not use the sink as a cutting surface. Use a cutting board instead.
- Avoid any strong chemical agents from coming into contact with the sink surface.
- Do not use abrasive cleaners or cleaning pads on the sink.
- Avoid leaving any strongly coloured substances (such as coffee, tea, red wine, vegetable juice etc) on the sink surface.
- Do not throw cutlery or other hard or pointed objects onto the sink surface, as this can damage the sink.

How to clean your sink

- For everyday cleaning, use warm water, liquid detergent and a soft cloth. Do not use abrasive cleaners or chemicals.
- Spillages of strongly coloured substances (eg coffee, red wine, vegetable juice etc) should be wiped up straight away.
- For further care and cleaning guidelines, refer to our website.




Apron front sink installation

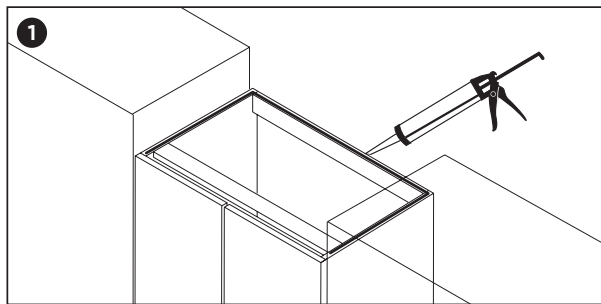

Ensure that the surface to be siliconed, where the sink will be located, is cleaned and free of grease. Ensure that the surface is level.

Apply a neat line of silicone as shown and position the sink in place. Allow time for the silicone to cure before using the sink.

IMPORTANT: Use silicone sealant. DO NOT USE EPOXY TYPE ADHESIVES. Use of epoxy adhesives will void the warranty.

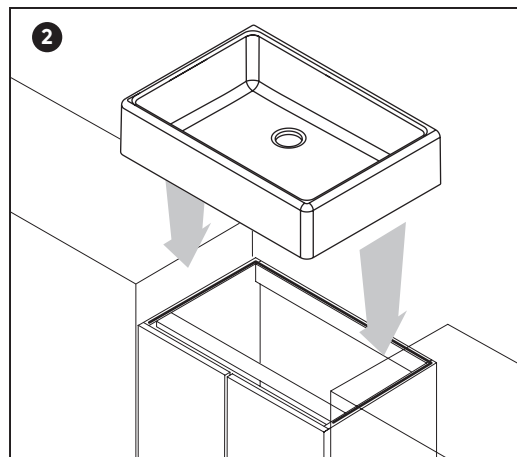

NOTE: Apron front sinks can be installed in a number of configurations. Often sinks are installed under the benchtop with the sink extending beyond the front of the cupboards, or sinks are installed level with the benchtop.

SEIMA


kitchen + laundry + bathroom ware

seima.com.au


Scan for more about
Arqstone sinks




Undermount sink installation

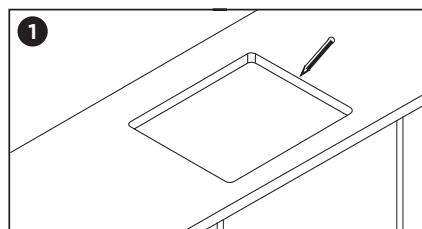


Use the actual product to draw and cut a precise hole in the benchtop. Make allowance for any polishing back that is required after cutting. Finish the hole rim.




Draw another line 10mm inside the sink top outline – This is the cutting line for the opening.




Place a neat line of silicone sealant around the sink rim.



Carefully locate the sink under the benchtop. The silicone will attach the sink to the benchtop.




Support and place upwards pressure on the sink to keep it in place while the silicone is curing.

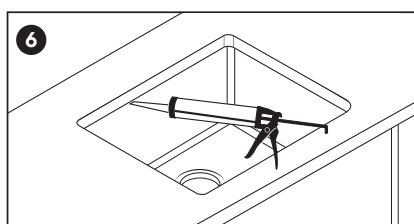

Use silicone to seal the gap between the benchtop and sink. Take care to ensure that the silicone is not visible.

IMPORTANT: Use silicone sealant. DO NOT USE EPOXY TYPE ADHESIVES. The use of epoxy adhesives will void the warranty.


Abovemount sink installation

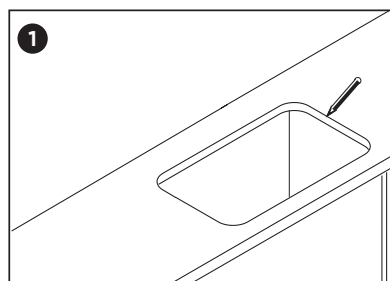




Use the actual product to draw and cut a precise hole in the benchtop.

If your sink has clips, use clips as well as silicone. Place a neat line of silicone under the rim of the sink and position the sink in place.

IMPORTANT: Use silicone sealant. DO NOT USE EPOXY TYPE ADHESIVES. The use of epoxy adhesives will void the warranty.



Draw another line 10mm inside the sink top outline – This is the cutting line for the opening.

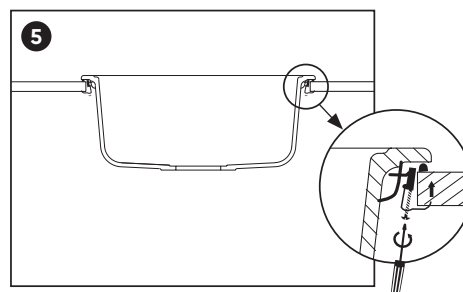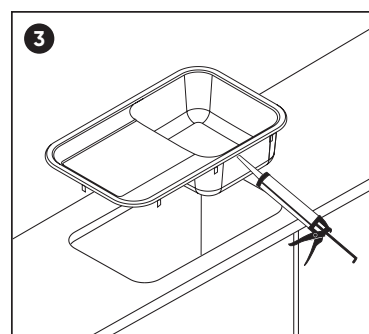

SEIMA

kitchen + laundry + bathroom ware

seima.com.au

Scan for more about
Arqstone sinks



arqstone-in | v 4.0 | 06-26 | p 2 of 2