

Modia Wall Faced

Collection: Elevate



Ceramic wall faced toilet suite

- Clean Flush, Nanoglaze, Easy Care Height
- Choice of toilet seats

Features

- Stylish minimalist design, sits flat against wall
- Clean Flush rimless pan design for an efficient, powerful flush
- Easy care height
- Compliant with **AS1428.1 Ambulant** guidelines
- White vitreous china with nanoglaze surface, easy to clean
- Soft-closing, easy-clean quick release seat with stainless steel pins
- S or P trap
- Universal cistern, suits back entry or bottom entry plumbing

Order codes

191760	Modia WF, Deluxe seat
191758	Modia WF, Slim seat
191843	Modia WF, Flat seat
191756	Modia WF, Classic seat

Product details

CISTERN	Back entry or bottom entry plumbing (left or right inlet).
PAN	Wall faced close coupled with rimless pan design.
TRAPS	Universal trap, suitable for S or P trap installations.
SEAT	Quick release seat with stainless steel hinges, soft closing.
SETOUT	Variable 90-180 using supplied connector; 150mm rec.
FIXING	This is a close coupled toilet suite — the cistern is fixed directly to the pan and does not require wall fixing. Pan may be bedded with cement base or using silicone sealant.
WELS RATING	4 Star 4.5/3L flush. Reg No. L05839. WELS Licence 0296. WM Licence 23345.

Premium Thermoset (UF)



- DELUXE SEAT - SILK FINISH**
- 40 mm lid profile / White
 - Premium quality
 - Easy to clean, anti-scratch
 - Rigid, ceramic-like surface
 - Made from Thermoset (UF)



- SLIM SEAT - SILK FINISH**
- 20 mm lid profile / White
 - Premium quality
 - Easy to clean, anti-scratch
 - Rigid, ceramic-like surface
 - Made from Thermoset (UF)




- FLAT SEAT - SILK FINISH**
- Flat lid and seat / White
 - Premium quality
 - Easy to clean, anti-scratch
 - Rigid, ceramic-like surface
 - Made from Thermoset (UF)

Thermoplastic (PP)



- CLASSIC SEAT - GLOSS FINISH**
- 40 mm lid profile / White
 - Lightweight, gloss finish
 - Easy to clean
 - Made from Thermoplastic (PP)

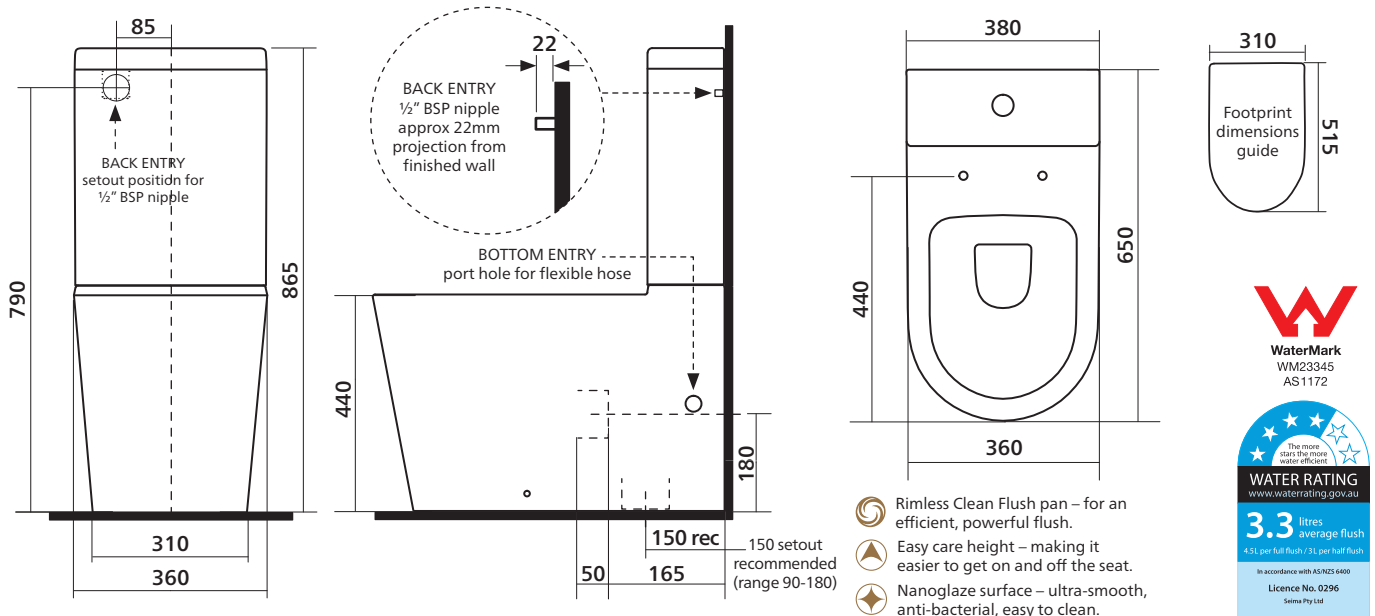

SEIMA

kitchen + laundry + bathroom ware

seima.com.au

Please note

- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding.
- Bedding: Pan may be bedded with cement base or using silicone sealant. Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.

- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.
- Do NOT use epoxy type adhesives.
- Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.