Chios Vortex Flush Wall Faced

Collection: Essential



Ceramic Wall Faced toilet suite
Vortex Flush

- Wall faced design, sits flat against wall
- Vortex Flush pan design for an efficient, powerful flush
- White vitreous china
- PP seat, soft-close, easy-clean quick release seat with stainless steel pins
- S or P trap
- Back entry or bottom entry plumbing

Order codes


192640	Chios Vortex Flush Wall Faced toilet

Product details

CISTERN	Suits back entry and bottom entry inlet plumbing.
PAN	Wall faced close coupled with Vortex Flush design, box rim.
TRAPS	Universal trap, suitable for S or P trap installations.
SEAT	PP seat, quick release with stainless steel hinges, soft closing.
SETOUT	Variable 100-180 mm using supplied connector.
FIXING	This is a close coupled toilet suite — the cistern is fixed directly to the pan and does not require wall fixing. Pan may be bedded with cement base or using silicone sealant.
WELS RATING	4 Star 4.5/3L flush. Reg No. L07724. WELS Licence 0296. WM Licence 23345.

See Vortex Flush™ in action ...
Click on image below or scan QR code



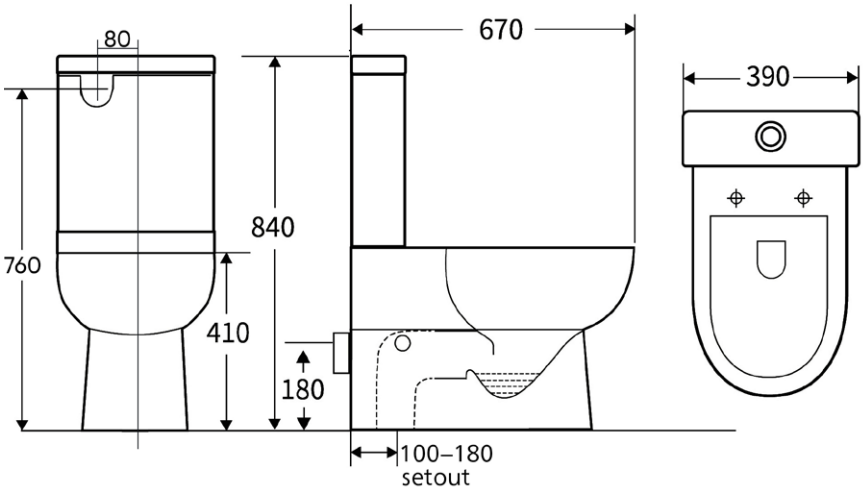

WaterMark
WM23345
AS1172

WATER RATING
www.waterrating.gov.au
3.2 litres average flush
4.5L per full flush / 3L per half flush
In accordance with AS/NZS 6400
Licence No. 0296
Seima Pty Ltd

SEIMA
kitchen + laundry + bathroom ware

seima.com.au

Please note
- Installation shall be in accordance with AS/NZS3500.
- All measurements are in millimetres. Height dimensions are to base of pan. Make allowance for bedding.
- Bedding: Pan may be bedded with cement base or using silicone sealant. Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement.
- Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.
- Do NOT use epoxy type adhesives.
- Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.